



E210 Engineering Cyber-Physical Systems

I2C Introduction


Bryce Himebaugh

Weekly Focus	Reading	Monday	Wed	Lab
CPS Intro/UART		1/10: CPS Introduction	1/12: Pi Intro/UART Bus	Project 0 Raspberry PI Setup
I2C Bus		1/17: MLK Day	1/19: I2C Bus Overview	Project 1 I2C Pressure/Temperature Sensor
I2C and SPI Bus		1/24: Pressure Sensor	1/26: SPI Bus Overview	Project 2 SPI Accelerometer
SPI/Networking		1/31: Accelerometer	2/2: Networking Overview	Project 3 Flask Web Server
Networking		2/7: Flask	2/9: Redis/matplotlib	Project 3 Continued
Web Server		2/14: CPS Wrapup	2/16: Exam Review	P5 Demultiplexer
Evaluation		2/21: Exam 1	2/23: CE Intro/ Logic	P6 ALU

<https://engr210.github.io/>




Raspberry I2C Link

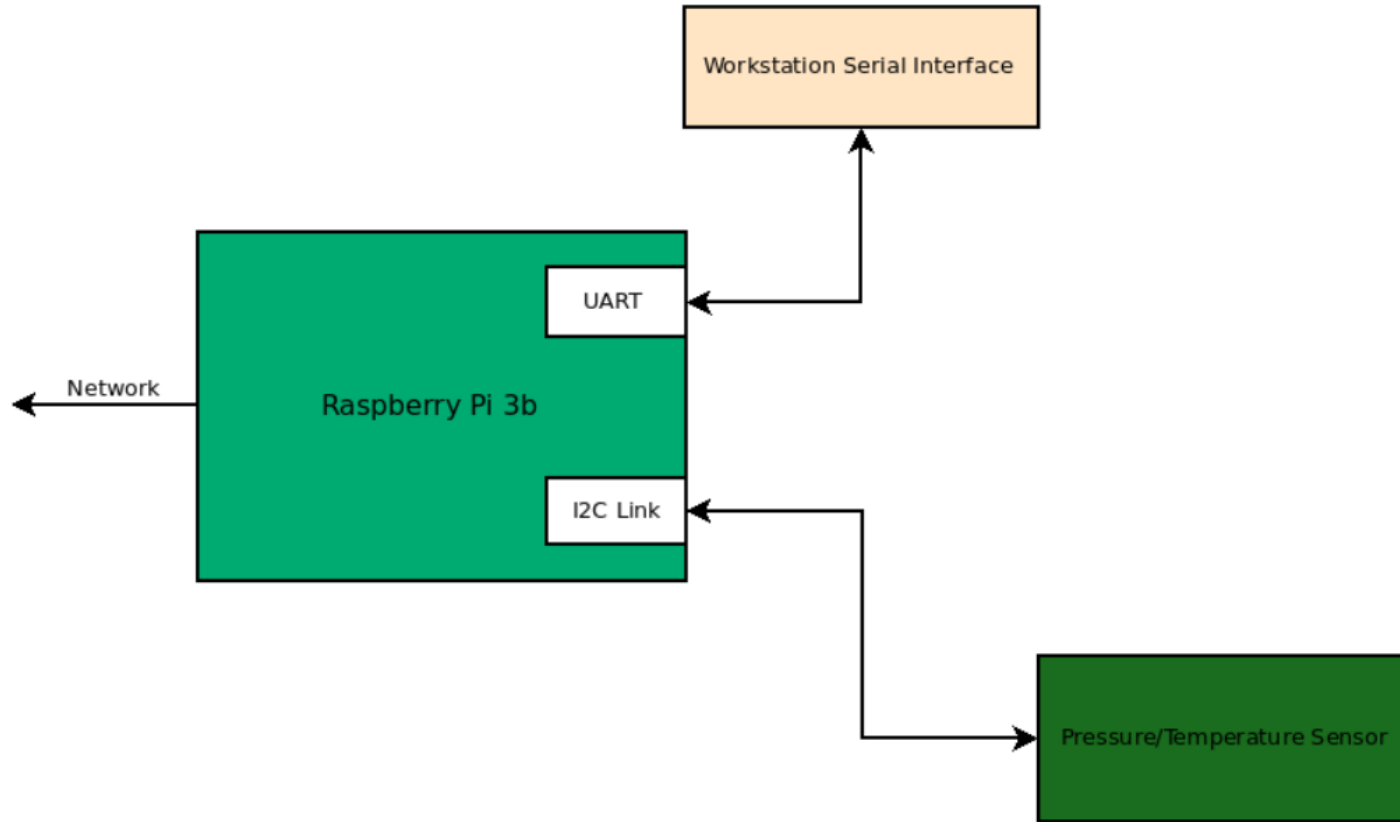

I2C Overview

What is I2C?

- Synchronous Serial Link
- 2 Wire Bus
 - Open Collector
 - Half Duplex
- Devices are Individually Addressable
- Multiple Bus Controllers Possible

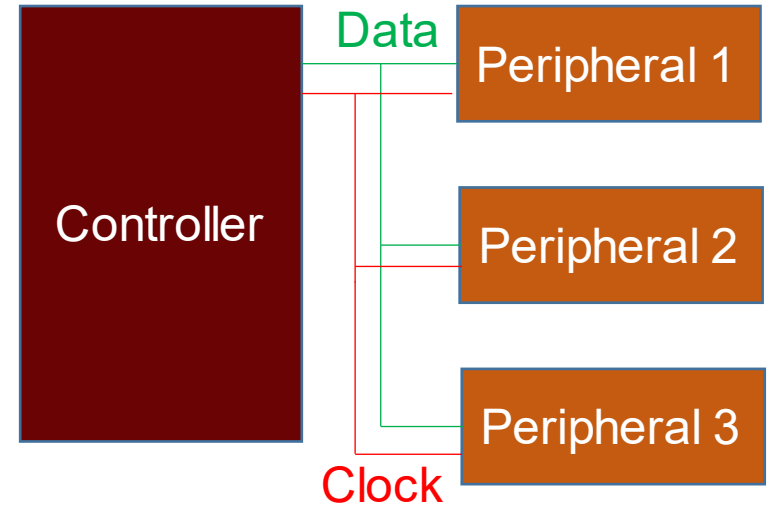



History of I2C

- Internally developed by Phillips Semiconductor in 1982
 - 100khz
 - 7-bit addresses: 128 devices on bus (practically 112)
- Public Specification in 1992
 - 400khz
 - 10-bit addresses possible
- Today
 - 5Mhz bus speeds



Comparison to UART

Category	I2C	UART
Clock	Synchronous	Asynchronous
Speed	400K Baud (5M Baud Max)	115K Baud
Transmission Mode	Half Duplex	Full Duplex
Number of Devices	112 (1024 possible)	2
Number of Pins	2 (Data, Clock)	2* (Rx, Tx), Optional (CTS,RTS)
Baud Rate Accuracy Requirement	N/A	~3% Baud Rate Accuracy
Development Complexity	More than UART	Less than I2C



Device Naming Conventions

[1] **Note:** You may be familiar with the terms "master" and "slave" to represent the relationship between devices on an I²C bus. The terms are considered obsolete and are now replaced with the terms "controller" and "peripheral," respectively.

Obsolete Name	Replacement Name
Master	Controller
Slave	Peripheral


The naming convention may vary depending on manufacturer, programming language, companies, or organizations (e.g. main/secondary, initiator-responder, source/replica, etc.). For more information, check out the following links.

- [Wikipedia: Terminology Concerns](#)
- [OSHA: A Resolution to Redefine SPI Signal Names](#)



<https://learn.sparkfun.com/tutorials/i2c/all>




Bus Connections

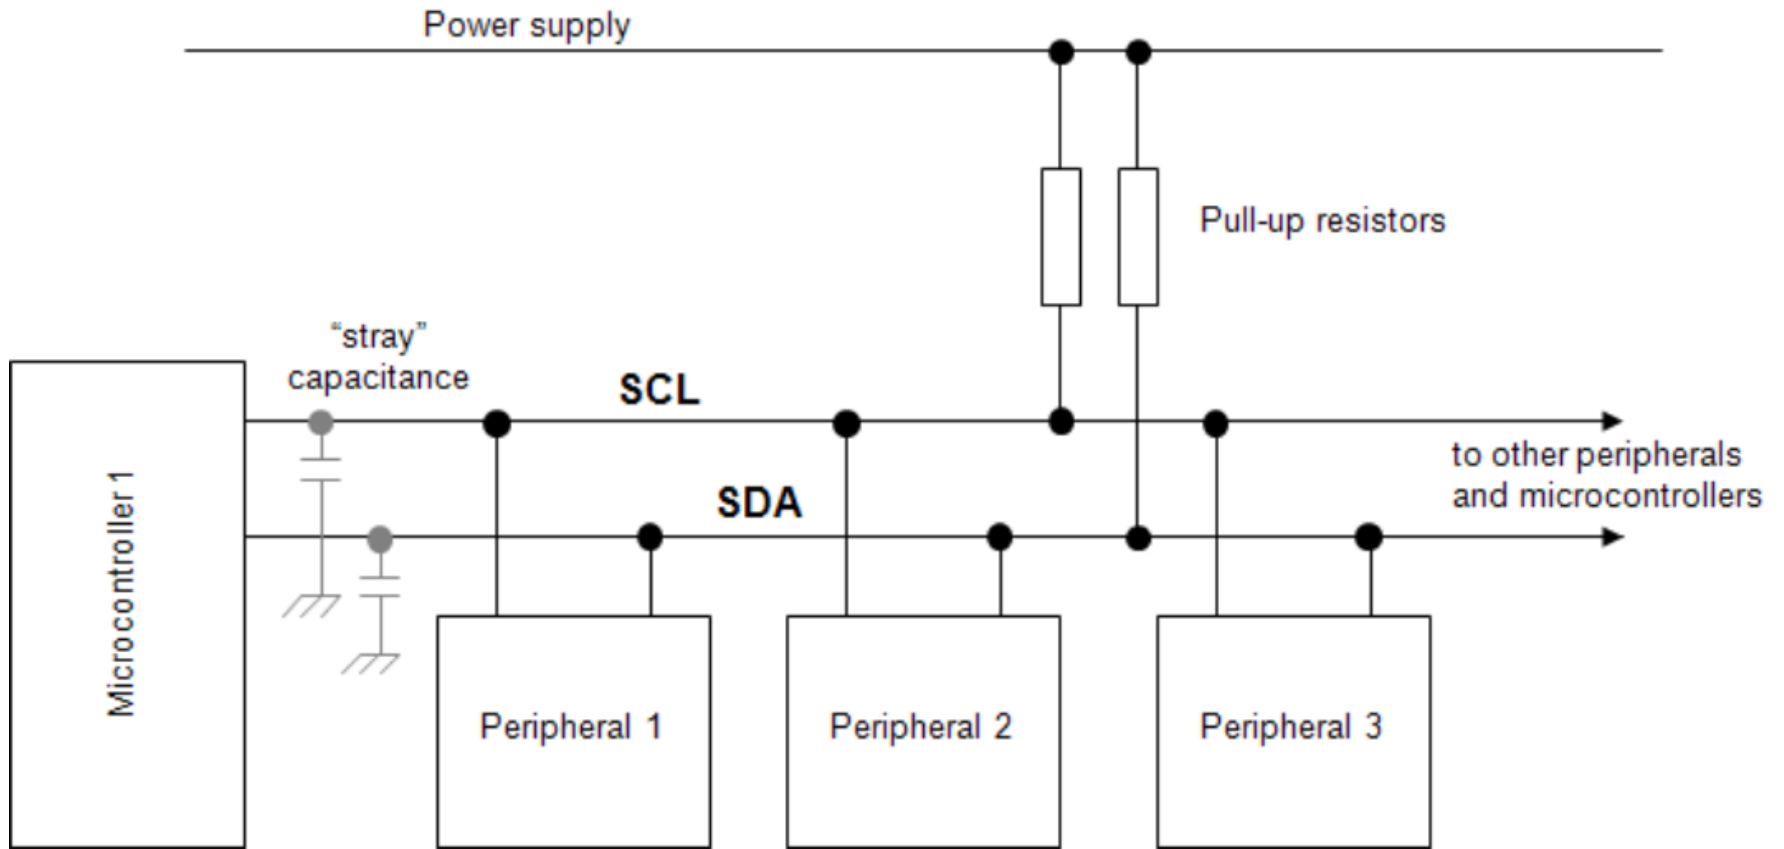


Standard vs Open-Collector Output

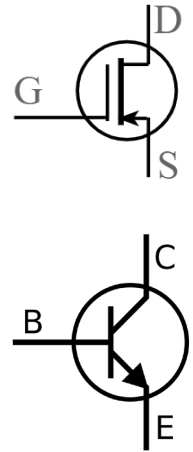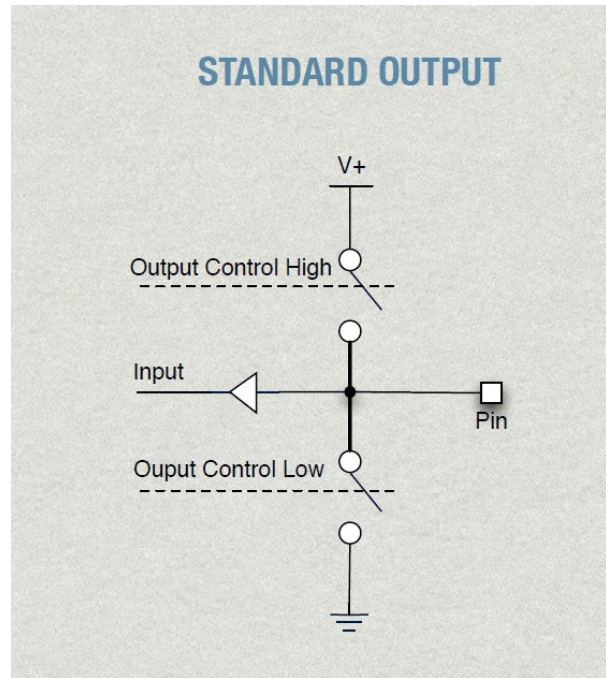


Output a 0

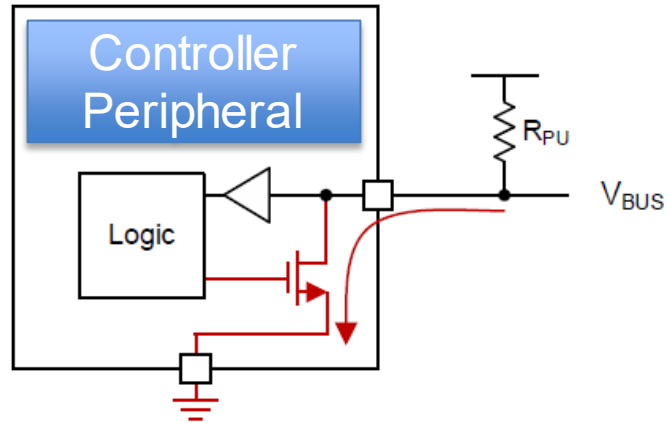

Output a 1

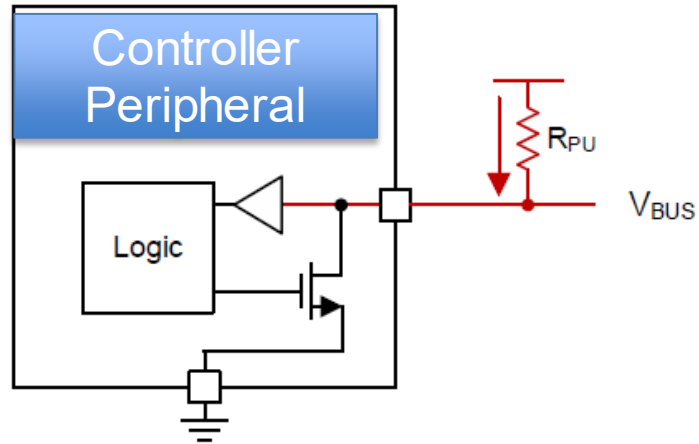

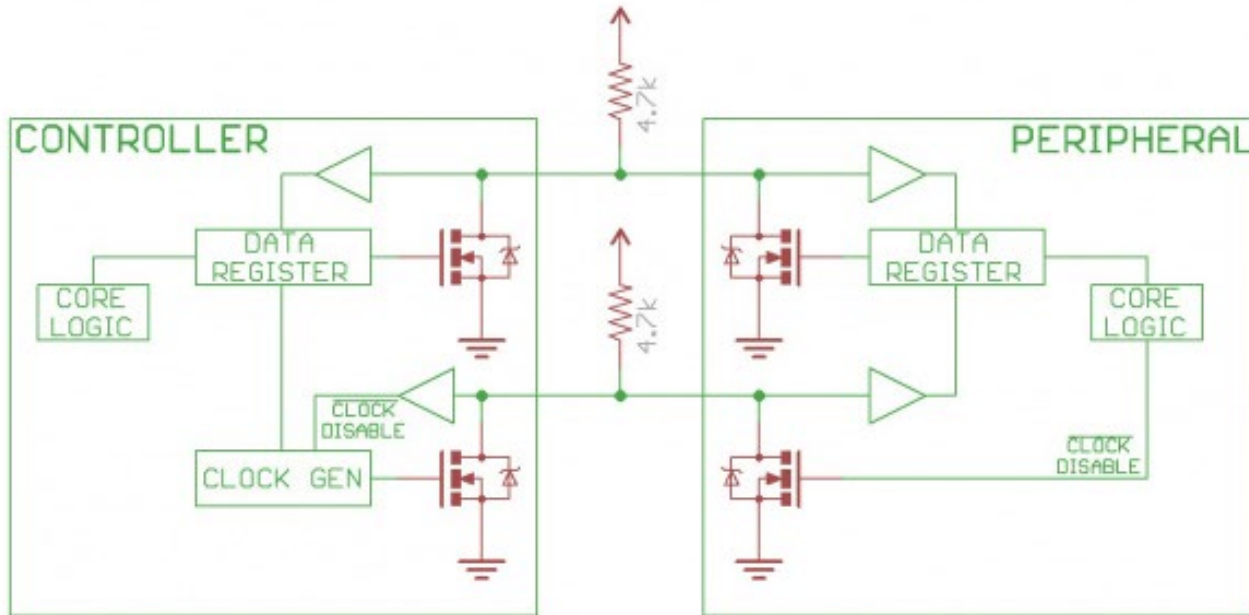


Notice the two pull-up resistors on the two communication lines.


<https://learn.sparkfun.com/tutorials/i2c/all>




Waveform

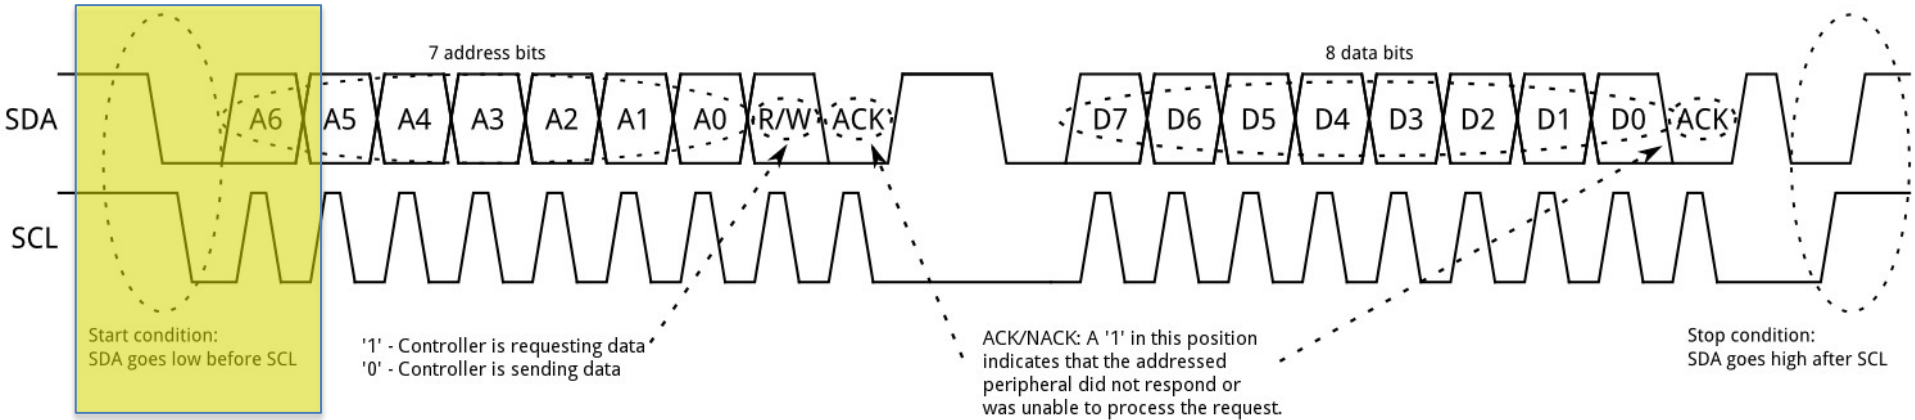


Waveform

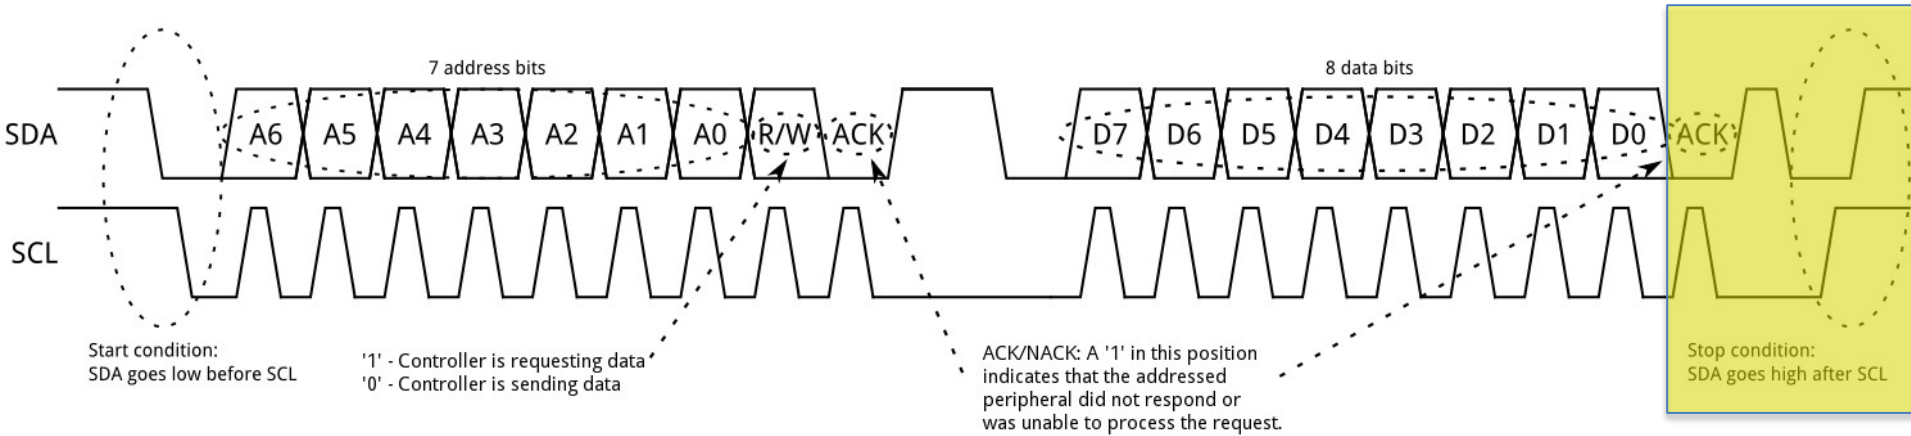


Waveform

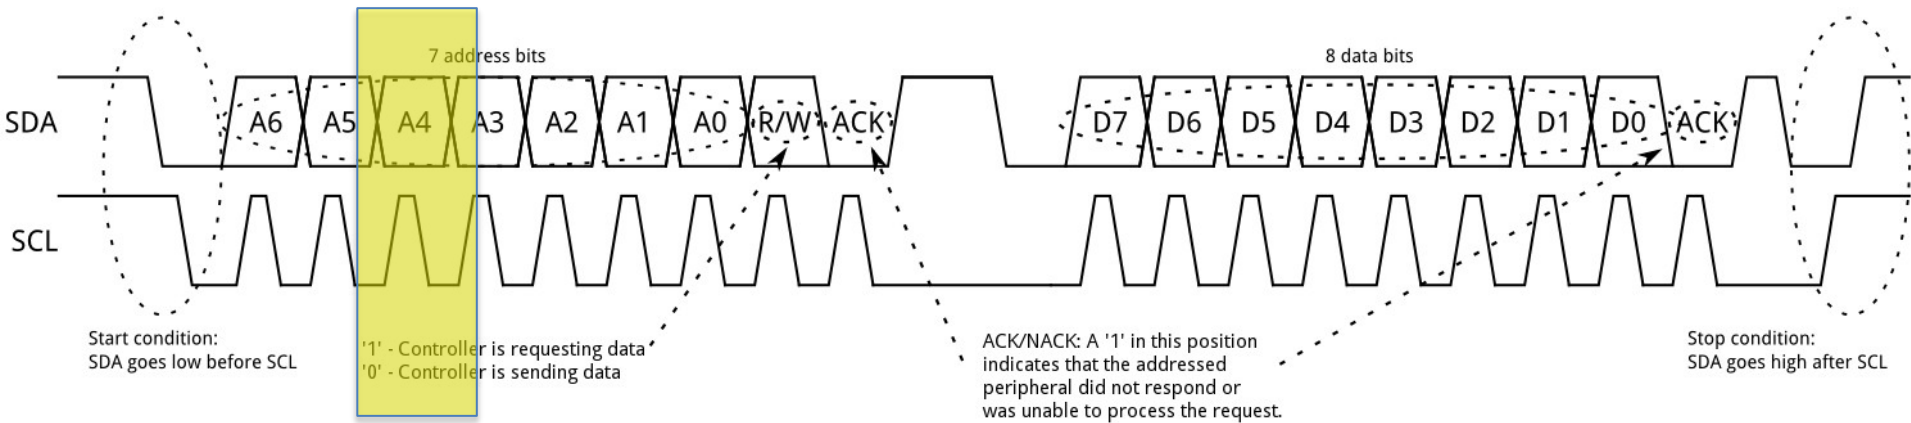

Waveform

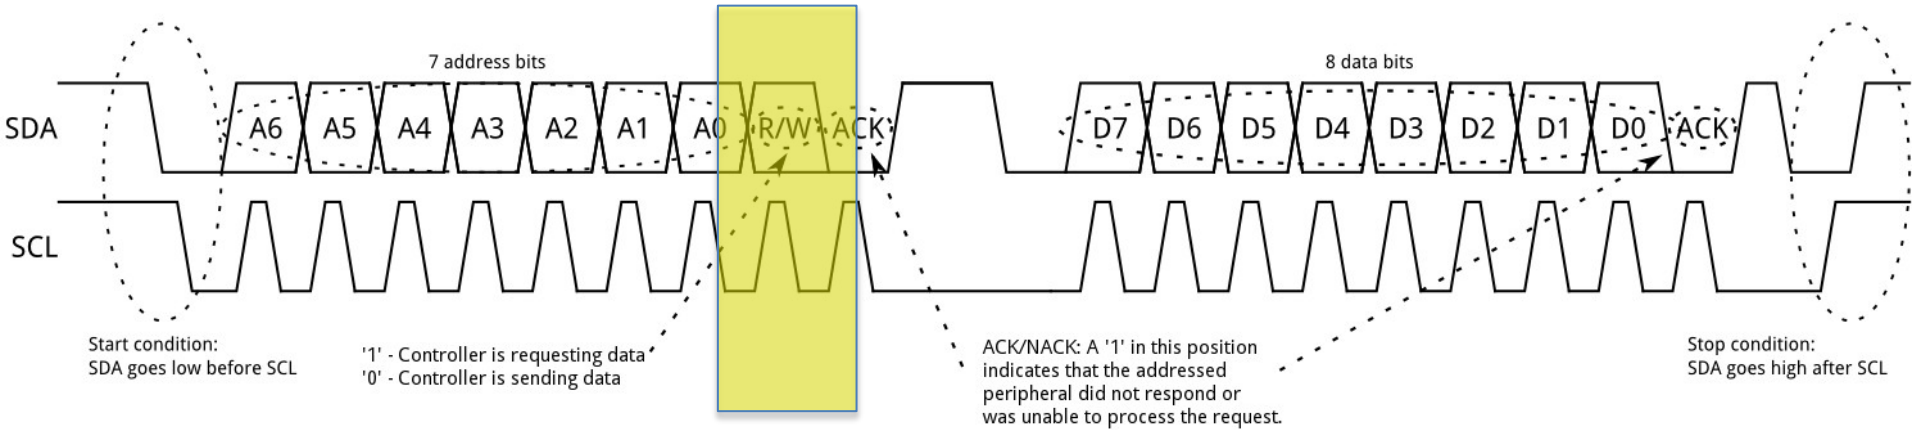

Waveform

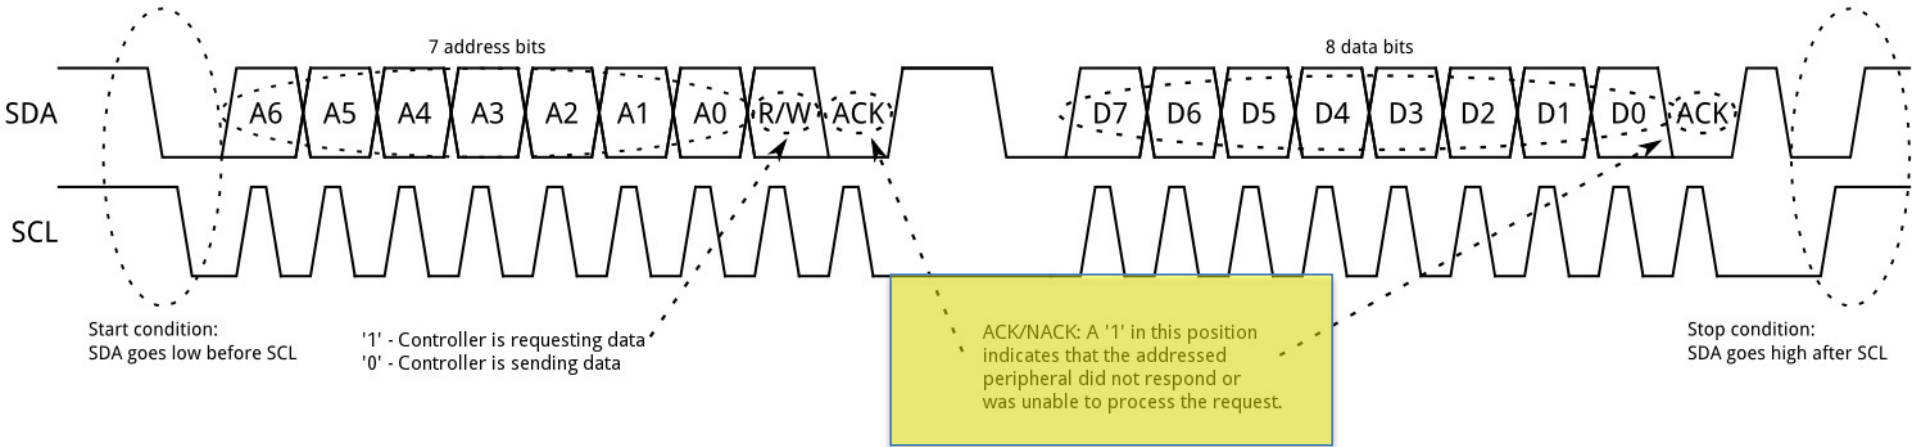


Peripheral Addressing

Bus Address vs Register Address



I2C Connections



Device Address: 0x5C or 0x5D
Depending on External Pin

Table 14 provides a list of the 8-bit registers embedded in the device and the related addresses.

Table 14. Registers address map

Name	Type	Register Address		Default	Function and comment
		Hex	Binary		
Reserved (Do not modify)		00-07 0D - 0E			Reserved
REF_P_XL	R/W	08	0001000	00000000	
REF_P_L	R/W	09	0001001	00000000	
REF_P_H	R/W	0A	0001010	00000000	
WHO_AM_I	R	0F	0001111	10111011	Dummy register
RES_CONF	R/W	10	0010000	01111010	
Reserved (Do not modify)		11-1F			Reserved
CTRL_REG1	R/W	20	010 0000	00000000	
CTRL_REG2	R/W	21	010 0001	00000000	
CTRL_REG3	R/W	22	010 0010	00000000	
INT_CFG_REG	R/W	23	0100011	00000000	
INT_SOURCE_REG	R	24	0100100	00000000	
THS_P_LOW_REG	R/W	25	0100101	00000000	
THS_P_HIGH_REG	R/W	26	0100110	00000000	
STATUS_REG	R	27	010 0111	00000000	
PRESS_POUT_XL_REH	R	28	010 1000	output	
PRESS_OUT_L	R	29	010 1001	output	
PRESS_OUT_H	R	2A	010 1010	output	
TEMP_OUT_L	R	2B	010 1011	output	
TEMP_OUT_H	R	2C	010 1100	output	
Reserved (Do not modify)		2D-2F			Reserved
AMP_CTRL	R/W	30	011 0000		Partially reserved



LPS331 Registers

Table 14 provides a list of the 8-bit registers embedded in the device and the related addresses.

Table 14. Registers address map

Name	Type	Register Address		Default	Function and comment
		Hex	Binary		
Reserved (Do not modify)		00-07 0D - 0E			Reserved
REF_P_XL	R/W	08	0001000	00000000	
REF_P_L	R/W	09	0001001	00000000	
REF_P_H	R/W	0A	0001010	00000000	
WHO_AM_I	R	0F	0001111	10111011	Dummy register
RES_CONF	R/W	10	0010000	011111010	
Reserved (Do not modify)		11-1F			Reserved
CTRL_REG1	R/W	20	010 0000	00000000	
CTRL_REG2	R/W	21	010 0001	00000000	
CTRL_REG3	R/W	22	010 0010	00000000	
INT_CFG_REG	R/W	23	0100011	00000000	
INT_SOURCE_REG	R	24	0100100	00000000	
THS_P_LOW_REG	R/W	25	0100101	00000000	
THS_P_HIGH_REG	R/W	26	0100110	00000000	
STATUS_REG	R	27	010 0111	00000000	
PRESS_POUT_XL_REH	R	28	010 1000	output	
PRESS_OUT_L	R	29	010 1001	output	
PRESS_OUT_H	R	2A	010 1010	output	
TEMP_OUT_L	R	2B	010 1011	output	
TEMP_OUT_H	R	2C	010 1100	output	
Reserved (Do not modify)		2D-2F			Reserved
AMP_CTRL	R/W	30	011 0000		Partially reserved



Communication Protocol

Write from Controller to Peripheral

Figure 8 shows an example of writing a single byte to a slave register.

- Master Controls SDA Line
- Slave Controls SDA Line

Write to One Register in a Device

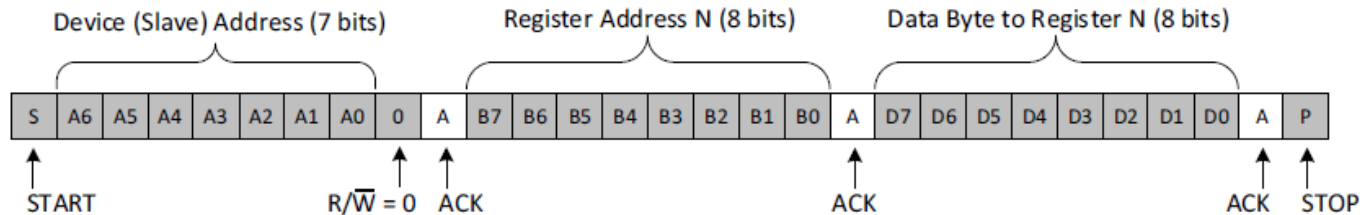


Figure 8. Example I²C Write to Slave Device's Register

<https://www.ti.com/lit/an/slua704/slua704.pdf>



Read Peripheral Register from Controller

- Master Controls SDA Line
- Slave Controls SDA Line

Read From One Register in a Device

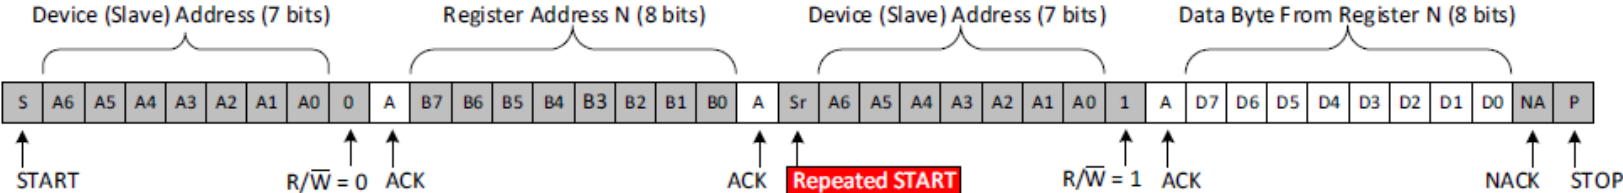


Figure 9. Example I²C Read from Slave Device's Register



LPS331AP Pressure Sensor



LPS331AP

MEMS pressure sensor: 260-1260 mbar absolute digital output barometer

Datasheet –production data

Features


- 260 to 1260 mbar absolute pressure range
- High-resolution mode: 0.020 mbar RMS
- Low power consumption:
 - Low resolution mode: 5.5 μ A
 - High resolution mode: 30 μ A
- High overpressure capability: 20x full scale
- Embedded temperature compensation
- Embedded 24-bit ADC
- Selectable ODR from 1 Hz to 25 Hz
- SPI and I²C interfaces
- Supply voltage: 1.71 to 3.6 V
- High shock survivability: 10,000 g
- Small and thin package
- ECOPACK[®] lead-free compliant

Applications

- Indoor and outdoor navigation
- Enhanced GPS for dead-reckoning
- Altimeter and barometer for portable devices
- Weather station equipment
- Sport watches

Description

The LPS331AP is an ultra compact absolute piezoresistive pressure sensor. It includes a monolithic sensing element and an IC interface able to take the information from the sensing element and to provide a digital signal to the external world.



The sensing element consists of a suspended membrane realized inside a single mono-silicon substrate. It is capable of detecting pressure and is manufactured using a dedicated process developed by ST, called *VENSENS*.

The *VENSENS* process allows to build a mono-silicon membrane above an air cavity with controlled gap and defined pressure. The membrane is very small compared to the traditionally built silicon micromachined membranes. Membrane breakage is prevented by an intrinsic mechanical stopper.

The IC interface is manufactured using a standard CMOS process that allows a high level of integration to design a dedicated circuit which is trimmed to better match the sensing element characteristics.

The LPS331AP is available in a small holed cap land grid array (HCLGA) package and it is guaranteed to operate over a temperature range extending from -40 °C to +85 °C. The package is holed to allow external pressure to reach the sensing element.

COVID-19 impact: We are still operating and shipping all orders! We are operating with a reduced staff, so for



Robotics & Electronics

Catalog

Forum

Blog

Support

Ordering

Distributors

About

Search

Electronics » Sensors » Environmental Sensors »

LPS331AP Pressure/Altitude Sensor Carrier with Voltage Regulator

Feedback

Comments or questions?

Services

- Custom Laser Cutting
- SMT Stencils

Products


New Products
Specials!

Robots

- 3pl
- Balboa
- Romi
- Zumo
- Kits, Soldering
- Kits, No Soldering

Electronics

- Arduino
- Audio
- Batteries
- Battery Holders



Pololu item #: 2126 **181** in stock
 Brand: Pololu
 Status: Clearance
 ✓ RoHS 3

Price break	Unit price (US\$)
1	3.95
5	3.63
25	3.34
100	3.08

Quantity: **Add to cart**
 backorders allowed **Add to wish list**





This carrier for ST's LPS331AP digital barometer measures pressures from 260 mbar to 1260 mbar (±2 mbar (0.2 kPa) and typical RMS noise of 0.02 mbar (0.002 kPa) in high-resolution mode. The regulator and integrated level shifters that allow it to work over an input voltage range of 2.5 V to



1.1 LPS331AP block diagram

Figure 1. LPS331AP block diagram

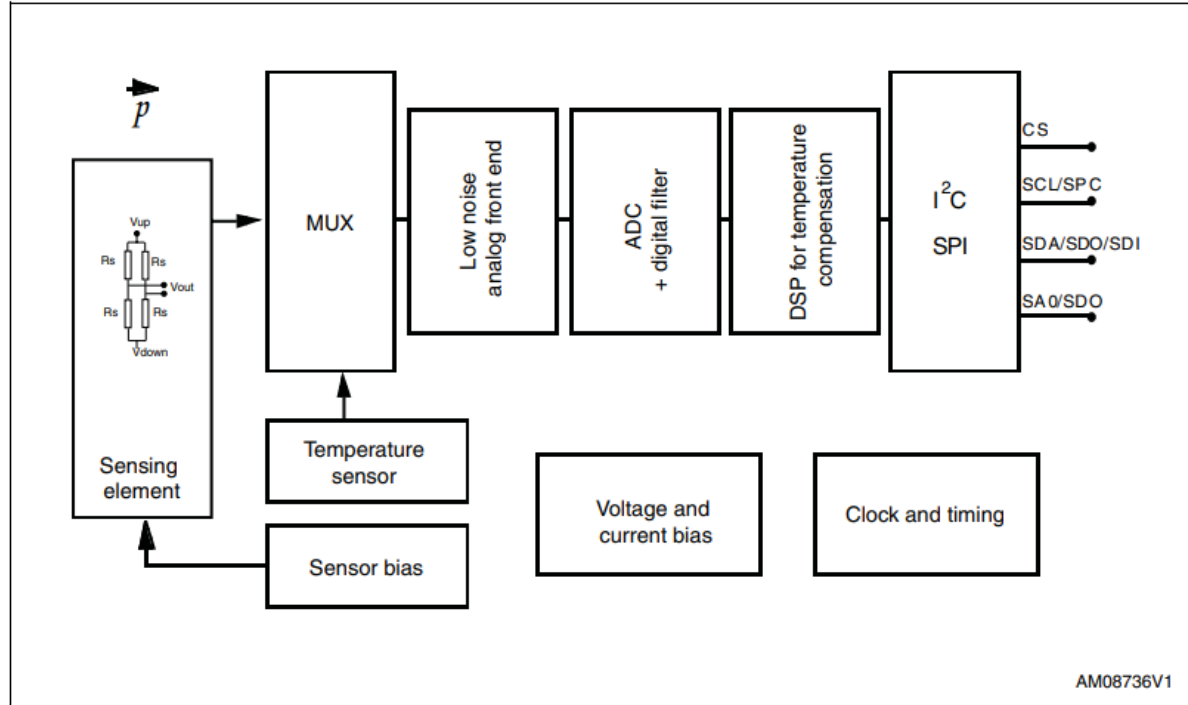

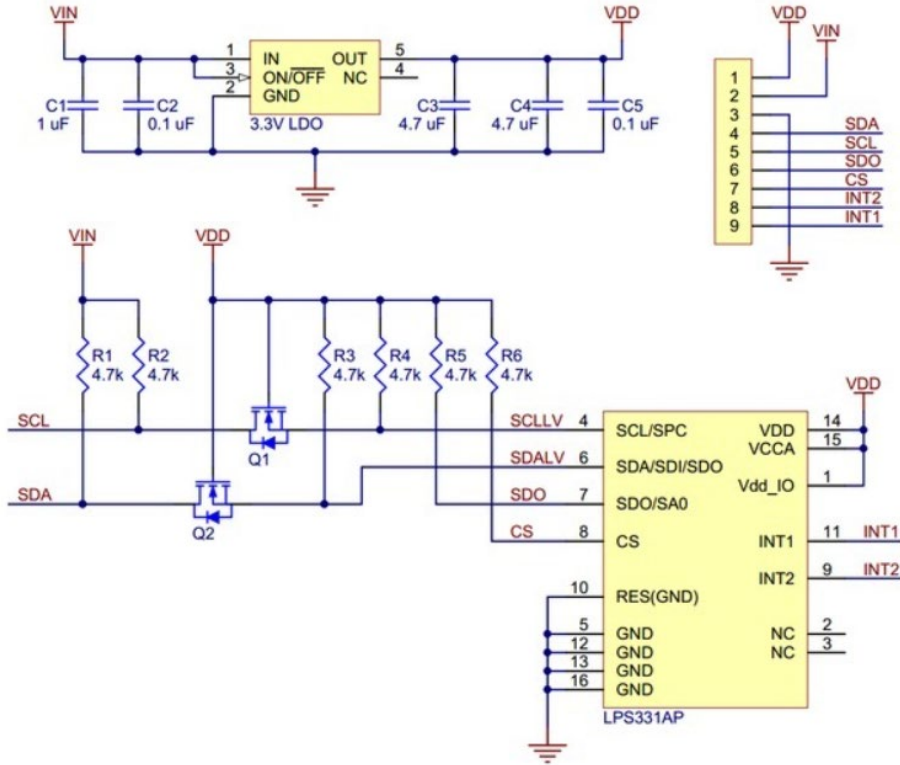

VDD (3.3V Out)
VIN (2.5–5.5V)
GND
SDA/SDI/SDO
SCL/SPC
SDO/SA0
CS
INT2
INT1

